


Standard Above Ground Fire Hydrant

- 80mm with Single or Double Instantaneous Lug
- Inlet: 80mm Male BSP thread
- Outlet: 65mm Female Instantaneous Outlet with Single or Double Lug
- Flow Rates: In Excess of 1200 litre per minute (SABS 1128)
- Body Material: SG Iron
- Spindle: Stainless Steel 13% chrome
- Spindle Square: 16mm (SABS 1128)
- Gate: EPDM Encapsulated - SG Iron
- Available with cap top or hand wheel
- Working Pressure: 20 Bar
- Handles and "T" - KEYS are available
- Weight: 5 Kg

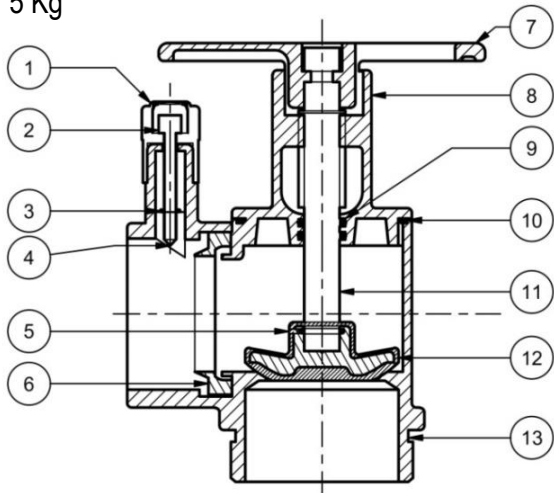

Material List		
Item	Part	Material
1	Instantaneous Cap	Nylon & Plastic
2	Pull Lug Cap Screw	Nickel Plated Mild Steel
3	Pull Lug Spring	Spring Steel
4	Catch Lug	Nickel Plated Ductile Iron
5	Grub Screw	Passivated Steel
6	Seal	EPDM
7	Hand Wheel	Ductile Iron, Epoxy Coated
8	Bonnet	Ductile Iron
9	Spindle O-Ring	EPDM / NBR
10	Bonnet O-Ring	EPDM / NBR
11	Spindle	Stainless Steel – Grd. 410
12	Gate	Ductile Iron EPDM totally encapsulated
13	Body	Ductile Iron, Epoxy Coated