


Pipe Fittings

Socketed – Cast SG Iron

The First Pipe Fitting to Hold SABS Mark Certification Tested To SANS 52842

- Lightweight
- Can handle high pressures/stress
- Spheroidal Graphite (SG) Iron Fitting For PVC Pipe
- Coating Options:
 - Bitumen Dipped
 - Fusion Bonded Epoxy (FBE)
 - Nylon 11 (Rilsan)
- Wall Thickness In Accordance With DIN16451 PT1
- Seals Perfectly At Low and High Pressures
- Rated 25 Bar Pressure and, tested 40 Bar Pressure

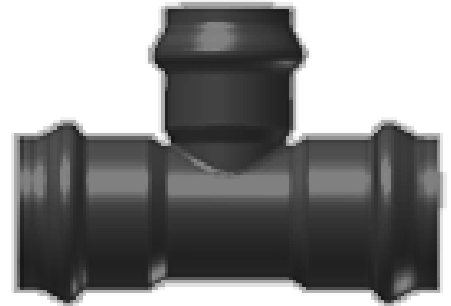

Unequal Tee



Equal Tee



Flange Adaptor



Straight Connector
(Repair Coupling)



Scour Tee



Socketed Reducer



End Cap



Reducing Bush