


Flanged Foot Valve

- Flanged Foot valve -Combination of a wafer non return and Galvanised steel basket.
- Option of wafer non return with Cast Iron Body Nickel plated discs or Cast Iron Body Stainless steel discs.
- For use in pumping applications.
- Suitable for use in Rivers and Dams.
- Screwed flange on request for sizes, DN50, DN80, DN100, DN150.
- 8mm Diameter perforations on basket.

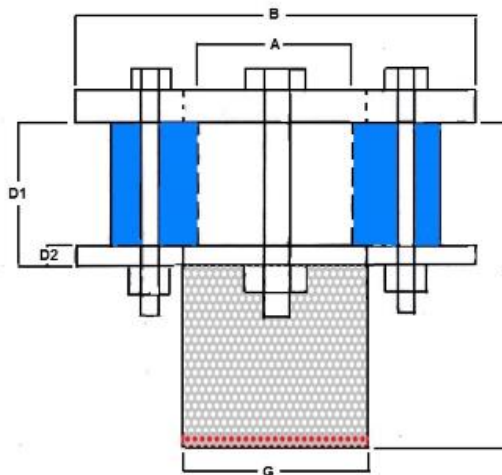

Dimensions							
DN	A	B	D1	D2	G	F	Mass (kg)
80	66	200	76	12	89	175	6
100	91	220	76	12	112	215	9
150	145	285	92	16	164	252	14
200	198	340	107	18	217	324	25
250	234	395	134	20	271	404	37
300	284	445	136	22	322	464	57
350	333	505	152	25	357	537	76
400	381	565	165	25	407	615	100
450	457	615	182	30	487	680	210
500	508	670	184	32	538	690	215