


Resilient Seal Gate Valve Spigot-Ended - SANS 664

- Non Rising Spindle
- Fusion Bonded Epoxy Powder coated / Epoxy Coated
- Gate SG Iron EPDM Encapsulated
- NBR Encapsulated Gate on request
- Right Hand or Left Hand Closing
- Cap Top or Hand Wheel Operated



Material List		
Item	Part	Material
1	Cap Top	SG Iron - Grd 420/12
2	Bonnet	SG Iron - Grd 420/12
3	Cap Screws	SS – Grd 304 / 316 HT Steel
4	Bonnet Gasket	Nitrile Rubber - NBR
5	Spindle	Stainless Steel - Grd 410
6	Gate Nut	Brass
7	Rubber Gate	SG Iron / EPDM / NBR Totally Encapsulated
8	Body	SG Iron - Grd 420/12 – FBE Coated
9	Circlip	Stainless Steel - Grd 410
10	O- Ring	Nitrile Rubber – NBR x 2
11	Seal	Nylon
12	Bolt	SS – Grd 304 / 316 / HT Steel Grd 8.8
13	Dust Wiper Seal	Nitrile Rubber - NBR
14	Gland Housing	Brass
15	Washer	Brass

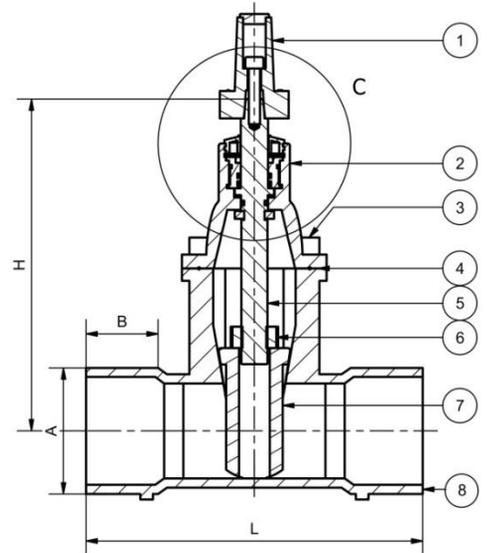

Dimensions					
DN	A	B	L	H	Mass (kg)
50	69	70	254	210	7
80	95	75	280	260	11
100	122	75	305	290	15
150	177	85	362	380	30
200	232	90	420	445	51
250	286	100	470	555	78
300	345	100	520	620	130

